


Dimensions shown are IEC/ANSI standards


<b>Nominal Voltage:</b>	9 V
<b>Nominal Internal Impedance:</b>	1,700 m-ohm @ 1kHz
<b>Average Weight:</b>	45 gm (1.6 oz.)
<b>Volume:</b>	22.8 cm <sup>3</sup> (1.39 in. <sup>3</sup> )
<b>Terminals:</b>	Miniature Snap
<b>Operating Temperature Range:</b>	-20°C to 54°C (-4°F to 130°F)
<b>NEDA/ANSI:</b>	1604A
<b>IEC:</b>	6LR61

**TYPICAL DISCHARGE CHARACTERISTICS AT 21 (70F)**

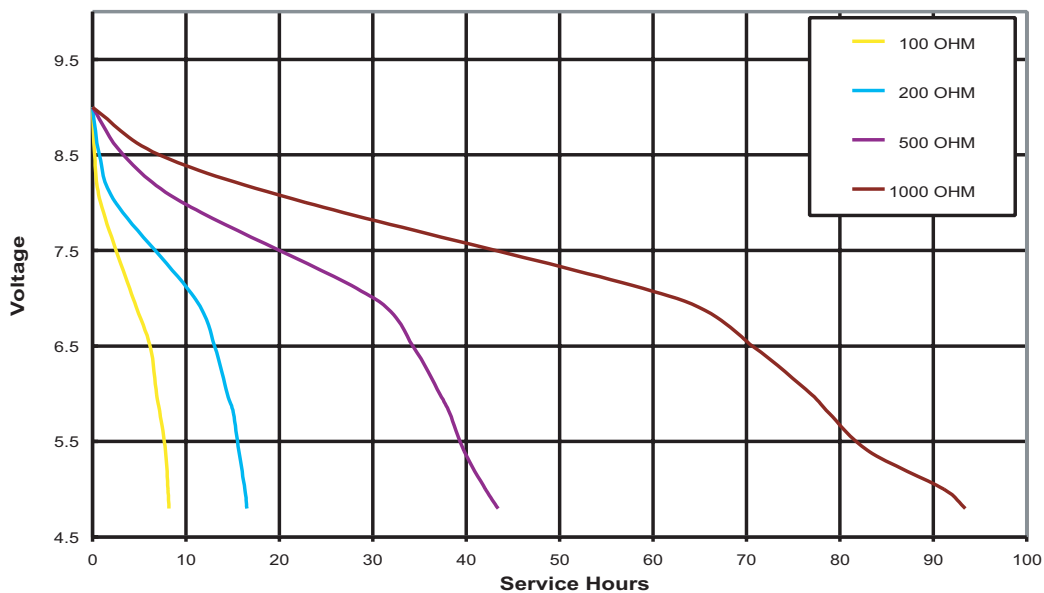

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


TYPICAL CONSTANT CURRENT DISCHARGE CHARACTERISTICS AT 21°C (70°F)

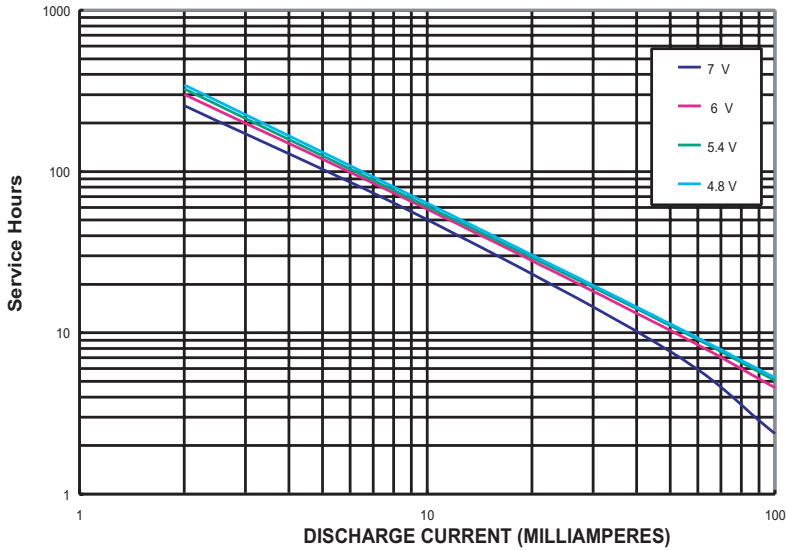

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)



TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

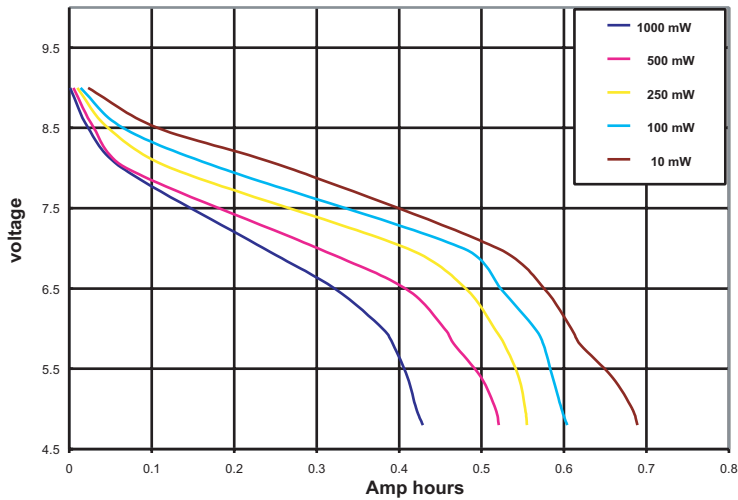

**DURACELL**<sup>®</sup>  
BATTERIES

Gillette Europe  
Geneva, Switzerland

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.